

**The World's  
Fastest Ducting**



**NORDFAB  
Ducting**

## The Right Hanger for Your Job

*Nordfab offers duct hangers in a variety of styles to fit a broad range of applications and duct locations.*

### Pipe Hanger HJ


Our HJ pipe hanger can be connected directly to the ceiling and provides a sturdy connection that keeps pipe movement to a minimum.



### Clamp Hanger

The "World's Fastest Hanger", the Clamp Hanger replaces the nuts and bolts that other hangers use with a genuine Nordfab QF clamp. Simply slide it into place and clamp it. Repositioning is no problem—simply unclamp the hanger, slide to the new position, and reclamp.

We had this hanger tested at an independent test lab and it held up under stresses most ductwork will never experience. Our 9" hanger held up to 170 lbs and the 20" held up to 850 lbs!




### Pipe Hanger

Our original pipe hanger provides a very sturdy connection that does not allow the pipe to move in any direction. And it fits most budgets.



### Gripple Hanger

Simply wrap Gripple wire around the underside of the ducting and secure the ends. In addition to saving time and reducing labor costs, the flexibility of Gripple hangers allows suspension of ductwork from any angle, yet maintains unyielding support.

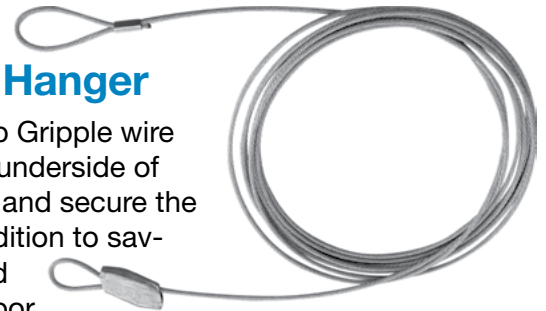


### Strut Hanger

For strut channel mounting (ideal when installing pipe close to a ceiling equipped with struts). Our strut hanger also was tested by an independent lab with the same "strong" results as the HJ. The 9" hanger held up to 170 lbs and the 20" held up to 850 lbs.



Check your local codes to ensure your ducting is properly supported. Nordfab can provide PE statements for many geographic areas.



800-532-0830 • [www.nordfab.com](http://www.nordfab.com)  
Made in the USA

# Nordfab Hanger Specifications

## PIPE HANGER HJ

SIZE Ø (IN)	PART NO.
3 - 24	3265-XX00-1HJ

Clearance hole 7/16"



## CLAMP HANGER

SIZE Ø (IN)	PART NO.
3	3265-0300-1QF000
4	3265-0400-1QF000
5	3265-0500-1QF000
6	3265-0600-1QF000
7	3265-0700-1QF000
8	3265-0800-1QF000
9	3265-0900-1QF000
10	3265-1000-1QF000
11	3265-1100-1QF000
12	3265-1200-1QF000
13	3265-1300-1QF000
14	3265-1400-1QF000
15	3265-1500-1QF000
16	3265-1600-1QF000
17	3265-1700-1QF000
18	3265-1800-1QF000
20	3265-2000-1QF000
22	3265-2200-1QF000
24	3265-2400-1QF000



## PIPE HANGER

SIZE Ø (IN)	PART NO.
3 - 40	3265-XX00



## GRIPPLER HANGER

SIZE WEIGHT	PART NO.
Up to 22lbs	3266-1500-022LBS
Up to 100lbs	3266-1500-100LBS
Up to 200lbs	3266-1500-200LBS
Up to 495lbs	3266-1500-495LBS
Up to 715lbs	3266-1500-715LBS

Supplied in 15' lengths.



## STRUT HANGER

SIZE Ø (IN)	PART NO.
3 - 24	3265-XX00-1mh

## Duct Installation Guidelines

*Factors to consider when choosing hangers and installing ducting:*

**Local codes** – Duct must be installed in accordance with local and national codes and SMACNA standards. Choose a hanger which meets code as well as your in-house requirements.

**Installation** – Should you use certified installers?

**Quantity** – Order enough hangers to support the duct, realizing that duct must support itself between hangers.

**Strength** – Hangers must not cave in or break down.

**Application** – Consider the density and amount of dust in your application.

**The “worst case scenario”** – What if your ducting were to fill with waste material due to a blockage or insufficient fan performance?

**Ceiling** – Is your ceiling able to withstand the calculated “worst case scenario” weight – should you add roof reinforcements / duct support stands?

**Seismic zone** – Earthquake-prone zones will require much stronger and more hangers than other areas.

**Engineering** – Always install duct according to engineered drawings – some areas require the drawings to be stamped by a state certified engineer.

